


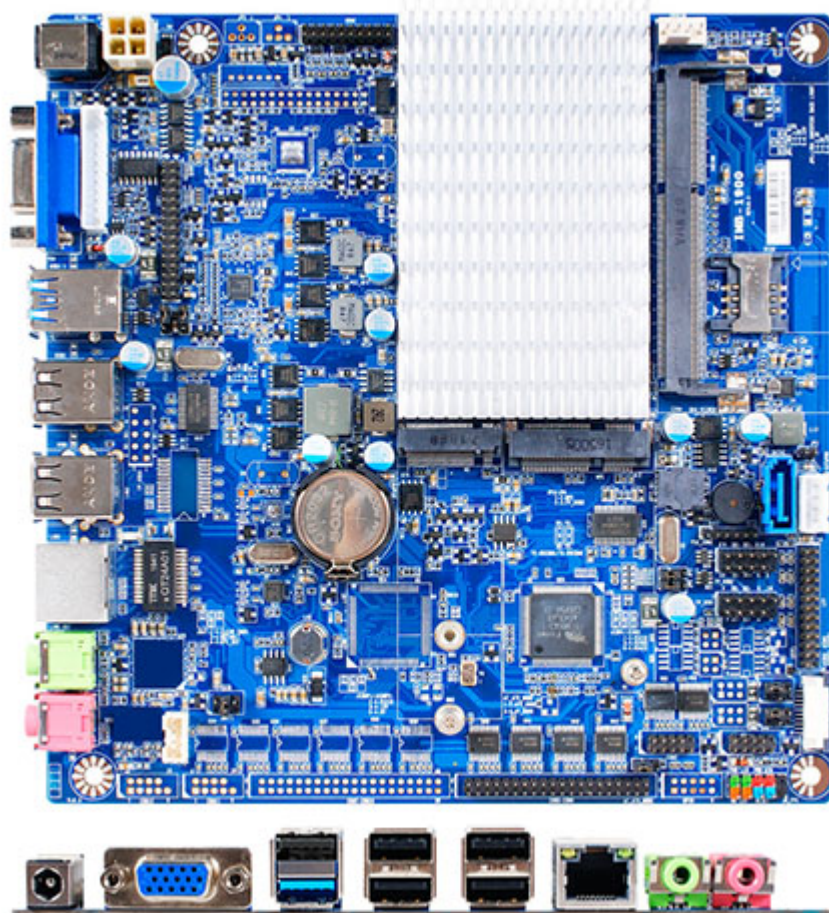

249.00 EUR

incl. 19% VAT, plus [shipping](#)

- J1900 ! JIMB-1900-6C !
- 6x USB !
- Power Onbaord !
- Thin miniITX !

Support:  [Datasheet](#)

- Intel® Quad Core J1900 processor
- ONE 204-pin SO-DIMM up to 8GB DDR3L 1333 MHz SDRAM
- Support 1\* VGA, 1\* HDMI
- Support 1\* Mini PCIe
- 1\* USB3.0, 9\* USB2.0, 6\* COM
- Thin Mini ITX Form Factor

|                        |                                                                                                                                                      |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Chipset</b>         | <ul style="list-style-type: none"> <li>– INTEL® Celeron™ J1900 (2.0 GHz) quad-core processor</li> <li>– 2 Phase CPU Power Support</li> </ul>         |
| <b>I.O Chipset</b>     | <ul style="list-style-type: none"> <li>– FINTEK F81866AD-I</li> </ul>                                                                                |
| <b>Memory</b>          | <ul style="list-style-type: none"> <li>– 1*SO-DIMM slot</li> <li>– Support DDR3L 1333</li> <li>– Max. capacity of system memory up to 8GB</li> </ul> |
| <b>Expansion Slots</b> | <ul style="list-style-type: none"> <li>– 1* Mini PCI-E connector</li> </ul>                                                                          |
| <b>Storage</b>         | <ul style="list-style-type: none"> <li>– 1* Serial ATA2 3Gb/s connector</li> <li>– 1* M.2 Connector(2242/2260)</li> </ul>                            |
| <b>Ethernet LAN</b>    | <ul style="list-style-type: none"> <li>– REALTEK® RTL8111G Chip</li> <li>– 1* PCI Express Gigabit LAN</li> </ul>                                     |
| <b>EDP</b>             | <ul style="list-style-type: none"> <li>– 1*EDP</li> </ul>                                                                                            |
| <b>USB</b>             | <ul style="list-style-type: none"> <li>– 1* USB3.0 Port</li> <li>– 9* USB 2.0(5 distribute in back panel, 4 distribute in mid-board)</li> </ul>      |

|                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|-------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Special Features</b> | <ul style="list-style-type: none"> <li>– Support CPU Smart Fan</li> <li>– Support Watch dog Technology</li> <li>– Support VGA header</li> <li>– Support HDMI header</li> <li>– Support Power On board</li> <li>– Support 2* RS422/RS485/RS232 COM ports</li> <li>– COM1/COM2 Support TTL</li> <li>– Thunder Protection Function</li> <li>– All Solid Capacitor design</li> <li>– All Power Pack MOSFET design</li> </ul>                                                                                                                                                                                                                                                                                                                        |
| <b>Back Panel I/O</b>   | <ul style="list-style-type: none"> <li>– 1* USB3.0 port</li> <li>– 5* USB 2.0 ports</li> <li>– 1* RJ-45 ports</li> <li>– 1* Line-out connector &amp; 1* MIC (<a href="#">No function</a>)</li> <li>– 1* VGA port (Max. Resolution: 1920*1200@60Hz)</li> <li>– 1* 12V DC in</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Internal I/O</b>     | <ul style="list-style-type: none"> <li>– 2* USB 2.0 headers for 4 USB 2.0 ports</li> <li>– 1* CPU / Chassis Fan connectors</li> <li>– 6* COM headers</li> <li>– 1* Parallel header</li> <li>– 1* PS2/KB header</li> <li>– 1* 4-pin ATX 12V Power connector</li> <li>– 1* 4-pin SATA Power connector</li> <li>– 1* 15-pin VGA header (Max. Resolution: 1920*1200@60Hz)</li> <li>– 1* 20-pin HDMI header (Max. Resolution: 1920*1200@60Hz)</li> <li>– 1* eDP header (Max. Resolution: 2560*1600@60Hz)</li> <li>– 1* Mini PCI-e connector</li> <li>– 1* M.2 Connector(2242/2260)</li> <li>– 1* SATA Connector</li> <li>– 1* Speaker header (<a href="#">No function</a>)</li> <li>– 1* Front panel header</li> <li>– 1* SIM Card socket</li> </ul> |
| <b>BIOS</b>             | <ul style="list-style-type: none"> <li>– AMI 64MB SPI ROM</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Temperature</b>      | <ul style="list-style-type: none"> <li>– Operating: 0°C ~ 60°C</li> <li>– Storage: -20°C ~ 85°C</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Form Factor</b>      | <ul style="list-style-type: none"> <li>– Thin mini ITX Form Factor (170mm X 170mm)</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |