

APPROVAL SHEET

CUSTOMER	神雲
CUSTOMER P/N	4 4 2 1 1 0 0 0 0 1 4 8
DESCRIPTION	24V/12.5A
EDAC MPN	EA13001N(TD01)
EDAC MODEL NO FOR SAFETY	EA13001N-240
DATE	2020-02-23
REVISION	2

APPROVED	DESIGN	PREPARE	RoHS
葉慶兵	朱杰鈴	朱杰鈴	
CONCLUSION 判定結果	APPROVED 承認	CONDITON APP'D 有條件承認	CUSTOMER'S SIGNATURE: 客戶簽章:



翌勝電子股份有限公司

EDAC POWER ELECTRONICS CO., LTD.
 新北市中和區建一路 150 號 11 樓之 2(E 棟)
 TEL:886-2-82263289 FAX:886-2-82263327

翌勝電子(蘇州)有限公司

Edac Power Electronics (Suzhou) Co., Ltd.
 江蘇省蘇州工業園區勝浦鎮常勝路 59 號
 No.59, Chang Sheng Road, Sheng Pu,
 Suzhou Industrial Park, Jiangsu, China
 Tel: 512-6282-1628 Fax: 512-6282-9608

東莞市翌勝電子有限公司

廣東省東莞市鳳崗鎮金鳳凰工業區金鳳凰大道108號
 Tel: 0769-38859898 Fax: 0769-38859897

SUBJECT: SCOPE OF DOCUMENT

CONTAINS :

1-0 General Description

2-0. Input Requirements

3-0. Output Requirements

4-0. Reliability

5-0. Environment

6-0. Safety

7-0. Mechanical Characteristics

1-0. General Description

The purpose of the document is to specify a Single phase AC input, single output switching power supply. This specification is suitable for: **EA13001N** Series

This product is AC to DC switching power transfer device, it can provide for a **24V/12.5A** max & **300W** max DC output with constant voltage source.

This Specification defines the input, output, performance characteristics, environment, noise and safety requirement for a power supply.

2-0. Input Requirements

2-1. Input Voltage:

Maximum Voltage: 264Vac

Normal Voltage: 100~240Vac

Minimum Voltage: 90Vac

2-2. Input Frequency:

Maximum Frequency: 63Hz

Normal Frequency: 50~60Hz

Minimum Frequency: 47Hz

2-3. Input Current

a. 5A (Max.) @ 115Vac input with full load.

b. 2.5A(Max.) @ 230Vac input with full load.

2-4. Energy saving standards :

Designed to meet the following standard :

Energy Star Ver. 2.0

DoE Level VI

ErP STEP-2

2-4-1 Efficiency:

Average Efficiency $\geq 88\%$ at 115Vac/60Hz & 230Vac/50Hz input voltage and 25%, 50%, 75% & 100% of max output current.

2-4-2 No Load Power Consumption:

No Load Watt $\leq 0.5W$ at normal line input

2-5. Configuration

3-wire AC input (Line ,Neutral, FG)

2-6. Input Fuse

The hot line side of the input shall have a fuse, rating (T6.3A/250V)

2-7. Inrush Current

The adapter cold inrush current should be less than the surge rating of its critical

components(include fuse and bulk rectifiers) under all conditions of line voltage and frequency. And we are sure that our adapters isn't damaged, the cold i²t calculation shows the endurance of them.

Maximum inrush current, from power-on(with power on an any point on the sinewave):

75A at 110 Vac

150A at 220 Vac At cold start, maximum load.

When doing the test, the adapter should be disconnected from power supply long enough until the electrical charge stored in all energy storage components(capacitors) has been fully discharged. Then apply the input voltage

2-8. Line Regulation

This line regulation is less than $\pm 2\%$, of rated output voltage @ full load.

2-9. Hold Up Time

10 mSec., @ Normal line, with full load.

2-10. Rise Time

100mSec., @ 115V AC input, with full load.

From 10% to 90% of output voltage.

2-11. Turn-ON Time

The output voltage should rise to 90% of rated output voltage in less than 3 SEC. from AC apply to 110Vac start up.

2-12. Harmonic Standard and Power Factor

The adapter complied with IEC 61000-3-2 class D harmonic standard while input power over than 75W. The P.F. shall >0.95 @100Vac input and >0.9 @240Vac input with full load condition.

3-0. Output Requirements

3-1. Output Voltage and Current

Output Voltage (Vdc)	Current Min.(A)	Current Max.(A)
+24	0	12.5

3-2. Load Regulation

Voltage (Vdc)	Tolerance (%)
O/P : +24	+5/, -5

3-3. Dynamic Load Regulation

±5% excursion for 50% - 100% or 100% - 50% load change of DC output at any frequency up to 1KHz(duty 50%)

3-4. Ripple & Noise

The power supply shall not exceed the following limits on the indicated voltage for 60Hz or 50Hz ripple, Switching frequency ripple and noise and dynamic load variations measured with a 20MHz bandwidth

Output	Ripple/Noise
O/P	2% max. of rated output voltage

Input condition : for rated voltage , Output condition : for max load

Ripple / Noise: 60Hz ripple + switching ripple and noise

Ripple & Noise are measured at the end of output cable which are added a 0.1uF ceramic capacitor and a 47uF electrolytic capacitor

3-5. Short circuit protection :

The output should shut-down when subjected to a short circuit($R < 0.3R$). After shut-down the power supply shall return to normal operating conditions after removing the short situation .

3-6. Over Voltage Protection

150% Max. of rated voltage.

The output voltage shall be shutdown and latched when OVP occurred.

3-7. Over Current Protection

105~150% of rated output current.

The adapter will enter protection at overload mode and no damage. It will enter into normal condition if the fault condition is removed.

3-8. Stability

2% Max. at constant load with constant input (after 30 minutes of operation).

3-9. Temperature Rise

Less than 45 °C on top/bottom case at normal AC input & 80% load of DC output at environment temperature 25 °C .

3-10. Drop-out (Power Line Disturbance)

Output voltage shall remain within the specified regulation range, through the absence of a line input during 1/2 cycle, at full load and normal AC line input

3-11. Voltage Isolation

The DC ground will be isolated from the AC neutral and AC line.

3-12. Over shoot

During either Turn-on or Turn-off of the power supply, the out put voltage should not exceed 110%Vo.
No voltage of opposite polarity shall be present on the output during turn-on or turn-off

4-0. Reliability

4-1. MTBF (MIL-HDBK-217F)


The power supply shall be designed and produced to have a mean time between failure (MTBF) of 100,000 hours at 25 degrees C.

5-0. Environment

5-1 Temperature

a. Operating : 0 to 40

b. Practical Operating: -30 to 60 (Over 40 need derating by 2.5%/)

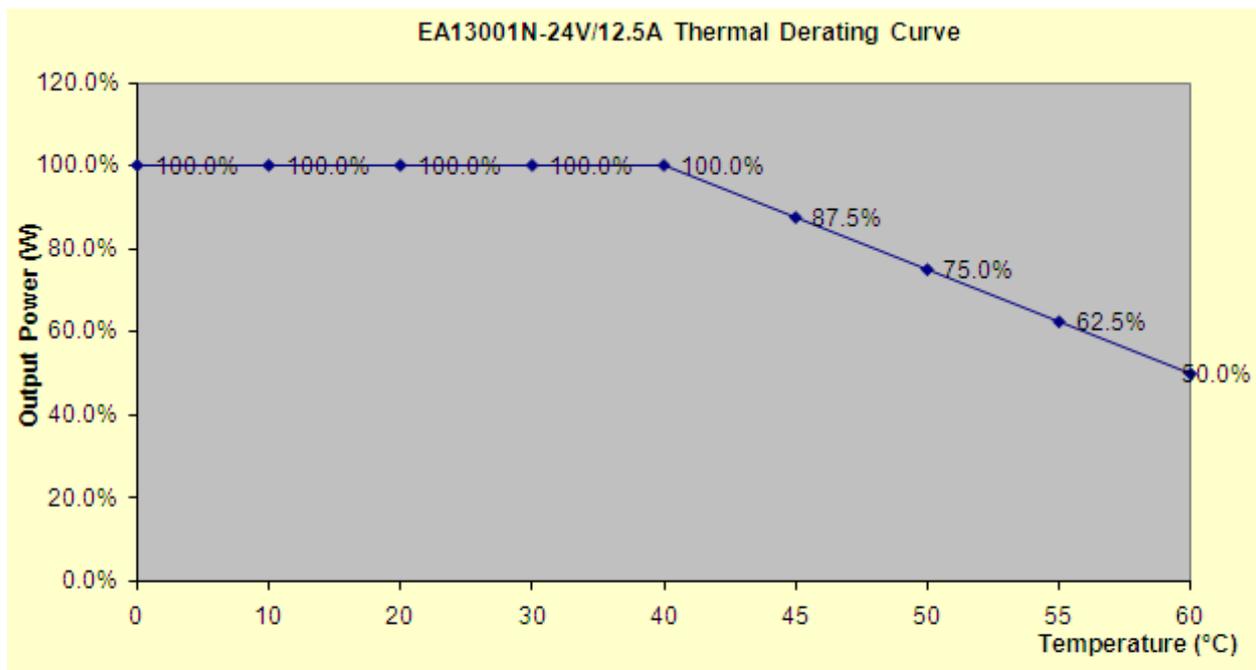

Temperature(°C)	0	10	20	30	40	45	50	55	60
Output Power(W)	300	300	300	300	300	262.5	225	187.5	150
Output Power(%)	100.0%	100.0%	100.0%	100.0%	100.0%	87.5%	75.0%	62.5%	50.0%

c. Storage : -20 to 85

5-2 Humidity

a. Operating : 10 to 90 %

b. Storage: 5 to 90 %

5-3 Altitude

From sea level to 5,000 Meter (operation) and 5,000 Meter (non operation)

6-0. Safety

6-1. Hi-Pot Test

L、 N--> FG : 1800Vac, 5mA, 2S

P --> S : 3000Vac 5mA 2S

6-2. Insulation Test

6-2-1 . 500Vdc, 3 Sec. between primary and secondary circuit, IR should 100 MΩ.

6-2-2. Grounding: 100mΩ Max 40A 2Sec

6-3. Leakage Current

3.5mA, at 240Vac/50 Hz

6-4. Safety

UL, CUL, TUV, CB, CE, FCC, CCC, PSE

6-5. EMS

Items	Specification	Reference
ESD	Contact: ± 4KV	IEC 61000-4-2
	Air: ± 8KV	
RS	Frequency: 80~1000MHz Field Strength: 3V/M , 80% AM(1KHz)	IEC 61000-4-3
EFT	± 1.0 KV on input AC power ports.	IEC 61000-4-4
SURGE	Line to Line: ± 1KV (peak)	IEC 61000-4-5
	Line to F.G : ± 2KV (peak)	

6-6. EMI

Comply with Standards
CISPR 32, EN 55032 Class B FCC PART Class B

7-0. Mechanical Characteristics

7-1. Physical Size : 197.5 mm (L) * 102 mm (W) * 51 mm (H)

7-2. Enclosure material : 94V-1 minimum

7-3. Output Cable (Reference) : UL1185 #12





7-4. Vibration Test

The vibration frequencies are set at 20Hz, with total amplitude of 1.5mm
Along the 3 directions namely X-Y-Z. The each direction should be vibrated
for 60 minutes, after testing no abnormal electrical or mechanical should occur.

7-5. Drop Test (Referencing to CSA C22.2 No.950/UL1950/UL1310/EN62368)

Products shall be dropped from a height of 1000 mm onto a horizontal surface
consists of hardwood at 13mm thick , mounted on two layers of plywood each
19mm to 20mm thick , all supported on a concrete or equivalent non-resilient
floor. Upon conclusion of test , the equipment cannot into hazardous moving
parts and hazardous voltage circuits need be operational , and need meet Hi-Pot
specification requirement .

7-6. Net Weight (Reference) : 1350±50 g(Ref.)

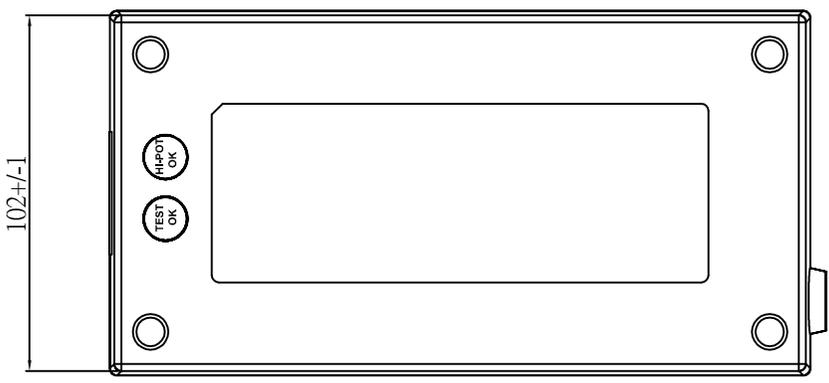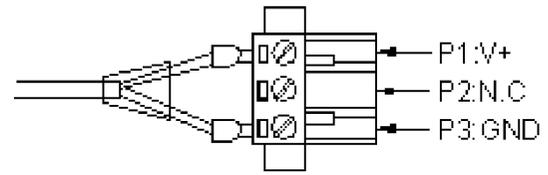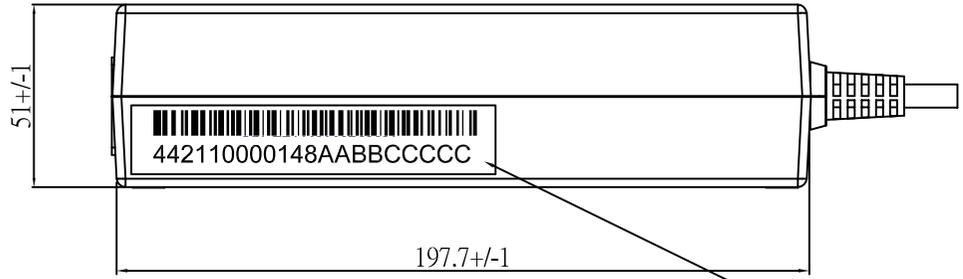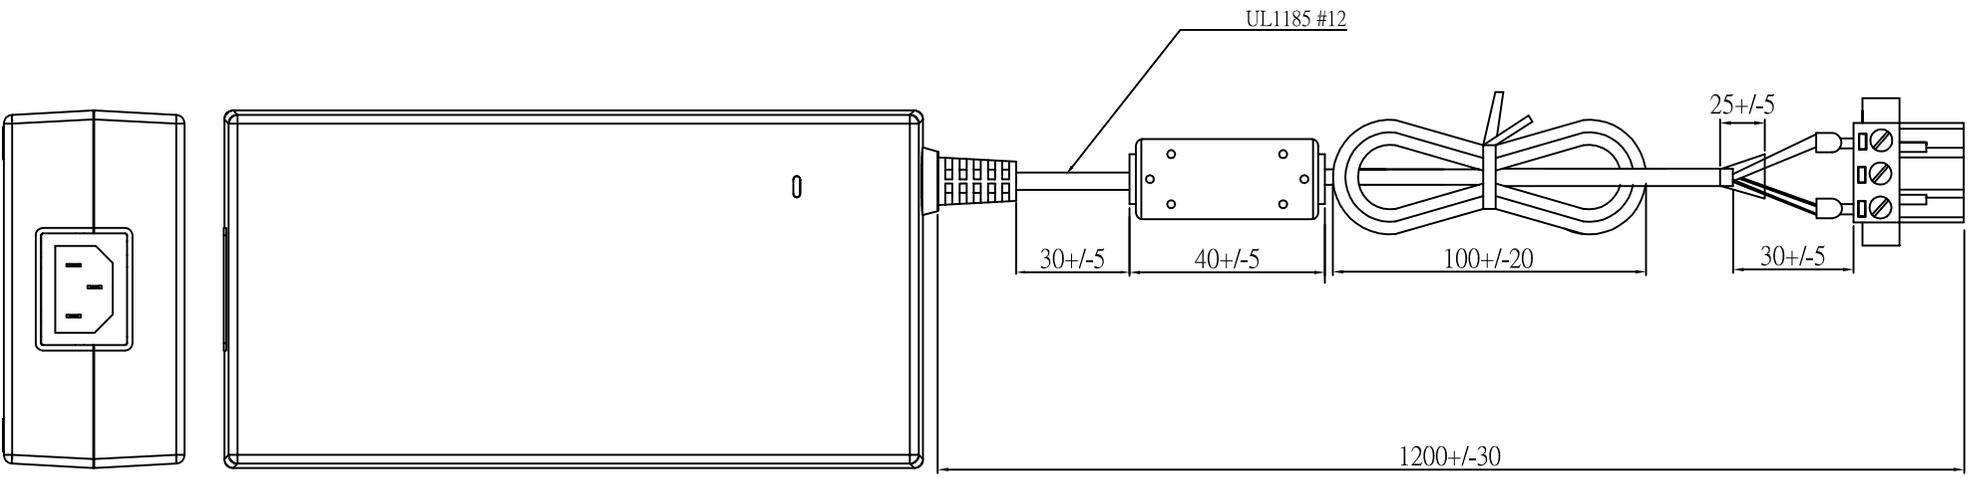

442110000148 AA BB CCCCC

- Production Serial Number
- Production Cycle Time
- Production Year
- Customer's p/n

EDAC POWER ELEC.				APPROVED
MODEL	EA13001N(CD01)	UNIT	mm	DESIGNED
color	BLACK	SCALE		CHECK
cus.		DATE	2019-06-04	DRAWING L.J.YU

49+/-1

139+/-1


EDAC EDACPOWER ELEC.

AC ADAPTER 电源适配器

MODEL 型号:EA13001N-240

AC INPUT 输入:100-240V~, 50-60Hz, 5-2.5A

DC OUTPUT 输出:24.0V= 12.5A 300.0W



CAUTION 注意
FOR INDOOR USE ONLY 室内产品使用
I.T.E. USE ONLY

DATE CODE:

20	21	22			1	2	3	4	5
1	2	3	4	5	6	7	8	9	0

出厂日期



I.T.E. POWER SUPPLY
41TJ
E209833



制造商: 翠胜电子股份有限公司



Mitac Japan Corp.

3312813003001



MADE IN CHINA 中国制造

EDAC P/N.: 312813003001

Background: Black color

Character: Silver color

Unit: mm